

FICHA TECNICA





Characteristic	1,1	Model	electromagnetism
	1,2	Power Type	Full electric
	1,3	Operation Type	Stand on
	1,4	Load Capacity	1500
	1,5	Load Center	500
	1,6	Bearing Distance	676
	1,7	Wheelbase	1430
Weight	2,1	Total Weight (With Battery)	1115
Wheels, Chassis	3,1	Wheel Type	PU
	3,2	Front Wheel	Φ80x70
	3,3	Rear Wheel	Φ230x75
	3,4	Front Wheelbase	490
	3,5	Rear Wheelbase	658
Dimensions	4,1	Mast Lowered Height	2060
	4,2	Lift Height	1600
	4,3	Height, mast extended	3541
	4,4	Handle Height	1430
	4,5	Fork Clearance When Mast Lowered	86
	4,6	Overall Length	2185/2605
	4,7	Overall Width	850
	4,8	Fork Size	65/190/1150
	4,9	Fork Spread	680
	4,1	Min. Ground Clearance	30
	4,11	Aisle Width, pallet 1000×1200 (1200 placed across forks) Pedal Folding	2615
	4,12	Aisle Width, pallet 1000×1200 (1200 placed across forks) Pedal Open	3016
	4,13	Min. Turning Radius	1729/2130
Performance	5,1	Travel Speed (Unladen/Laden)	5.5/5
	5,2	Lifting Speed (Unladen/Laden)	0.1/0.09
	5,3	Lower Speed (Unladen/Laden)	0.082/0.115
	5,4	Max. gradeability (Unladen/Laden)	8/6
	5,5	Service Brake	electromagnetism
Motor, Charger	6,1	Drive Motor	1,5
	6,2	Lift Motor	2,2
	6,3	Battery Type	Lead-acid battery
	6,4	Battery voltage/nominal capacity	24/210
	6,5	Charger	24/30
Other	7,1	Type of drive control	AC
	7,2	Sound level at the driver's ear acc. to EN12053	75

APILADOR ELECTRICO

CDD15 - 1.5tn 1,60mts

FICHA TECNICA

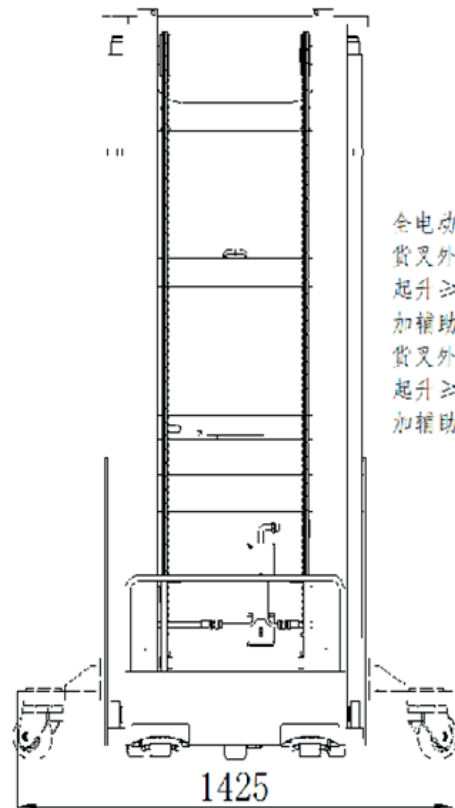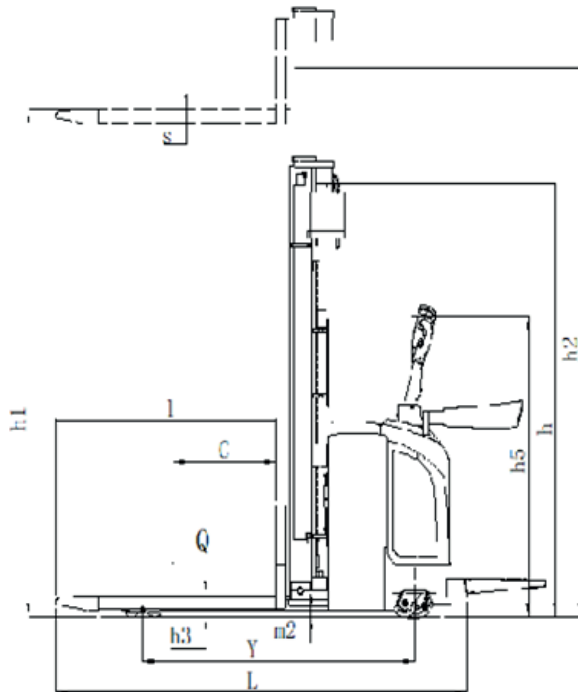

全电动堆高车:
货叉外宽680:
起升 ≥ 5000
加辅助轮:
货叉外宽560:
起升 ≥ 3500
加辅助轮.

